

HELI


JS07

**Self Propelled Scissor
Type Aerial Work Platform**




JS07 Self Propelled ScissorType Aerial Work Platform

Model	JS0607		JS0607E		JS0607W		JS0607WE		
Dimension	Metric	US	Metric	US	Metric	US	Metric	US	
A1 Max.working height	m	7.8	25ft7in	7.8	25ft7in	7.8	25ft7in	7.8	25ft7in
A2 Max.platform height	m	5.8	19ft	5.8	19ft	5.8	19ft	5.8	19ft
B Overall length	m	1.84	6ft	1.84	6ft	1.84	6ft	1.84	6ft
C Overall width	m	0.76	2ft6in	0.76	2ft6in	0.81	2ft8in	0.81	2ft8in
D Overall height(guardrail unfolded)	m	1.99	6ft6in	1.99	6ft6in	1.99	6ft6in	1.99	6ft6in
Hight stowed-rails folded	m	1.84	6ft	1.84	6ft	1.84	6ft	1.84	6ft
Platform Size(length X width)(EXF)	m	1.65x0.76	65x30in	1.65x0.76	65x30in	1.65x0.76	65x30in	1.65x0.76	65x30in
Guardrail hight(G)	m	1.1	3ft 7in	1.1	3ft 7in	1.1	3ft 7in	1.1	3ft 7in
H Extension size of platform	m	0.9	2ft11in	0.9	2ft11in	0.9	2ft11in	0.9	2ft11in
I Ground clearance(retracted state)	mm	60	2.4in	60	2.4in	60	2.4in	60	2.4in
J Ground clearance(lifting state)	mm	15	0.6in	15	0.6in	15	0.6in	15	0.6in
K Wheelbase	m	1.36	4ft6in	1.36	4ft6in	1.36	4ft6in	1.36	4ft6in
Performance									
Max.number of workers(indoor/outdoor)		2 / -	2 / -	2 / -	2 / -	2 / 1	2 / 1	2/1	2 / 1
Rated capacity	kg	230	507lb	230	507lb	230	507lb	230	507lb
Rated capacity of extension platform	kg	120	265lb	120	265lb	120	265lb	120	265lb
Drive speed(retracted state)	km/h	0~4	0~2.5mph	0~4	0~2.5mph	0~4	0~2.5mph	0~4	0~2.5mph
Drive speed(lifting state)	km/h	0~0.8	0~0.5mph	0~0.8	0~0.5mph	0~0.8	0~0.5mph	0~0.8	0~0.5mph
Min.turning radius(inside)	m	0	0	0	0	0	0	0	0
Min.turning radius(outside)	m	1.55	5ft1in	1.55	5ft1in	1.55	5ft1in	1.55	5ft1in
Lifting/Falling time	s	18/28	18/28	18/28	18/28	18/28	18/28	18/28	18/28
Max.work slop(forward and backward/left and right)	°	3°/1.5°	3°/1.5°	3°/1.5°	3°/1.5°	3°/1.5°	3°/1.5°	3°/1.5°	3°/1.5°
Max.allowable wind speed(indoor/outdoor)	m/s	0/0	0/0	0/0	0/0	0/12.5	0/27.9mph	0/12.5	0/27.9mph
Max.allowable lateral force(indoor/outdoor)	N	400/0	400/0	400/0	400/0	400/200	400/200	400/200	400/200
Gradeability	%	25	25	30	30	25	25	30	30
Controls type		Proportional control		Proportional control		Proportional control		Proportional control	
Drive		Dual front wheels	Dual front wheels	Dual front wheels	Dual front wheels	Dual front wheels	Dual front wheels	Dual front wheels	Dual front wheels
Brake		Dual rear wheels	Dual rear wheels	Dual front wheels	Dual front wheels	Dual rear wheels	Dual rear wheels	Dual front wheels	Dual front wheels
Tires size	mm	323*100	12.7*3.9in	323*100	12.7*3.9in	323*100	12.7*3.9in	323*100	12.7*3.9in
Power									
Lifting/driving motor power	kw	3.3	3.3	2.2/0.7x2	2.2/0.7x2	3.3	3.3	2.2/0.7x2	2.2/0.7x2
Battery voltage/capacity	V/Ah	6x4/200	6x4/200	6x4/200	6x4/200	6x4/200	6x4/200	6x4/200	6x4/200
Charger input voltage	VAC	100-240	100-240	100-240	100-240	100-240	100-240	100-240	100-240
Charger output current	A	36	36	36	36	36	36	36	36
Controls voltage	VDC	24	24	24	24	24	24	24	24
Weight									
Overall weight	kg	1480	3263lb	1480	3263lb	1500	3307lb	1500	3307lb

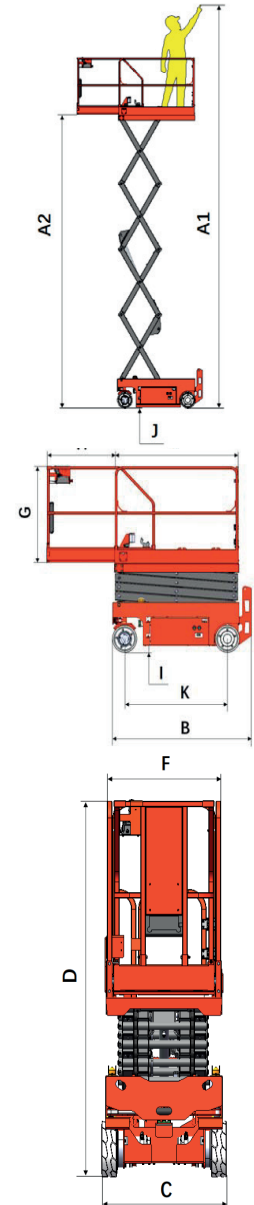

Our products are subject to improvements and changes without notice.

Standard configurations								
Proportional control	Extension platform	Emergency stop device	Intelligent danger alarm	Working timer	Emergency falling system	Automatic brake system	Action buzzer	repair safety arm
Manual brake release	Automatic fault diagnosis	Drive at all height	Charging action interlock	Auto-protection on holes on the ground	Working strobe warning light	Oil pipe explosion proof system	Anti-pinch system	Standard transportation on truck hole
Optional configurations								
AC power to platform	Lithium battery	Platform anti-collision device	Pneumatic pipe to platform	Generator to platform	Intelligent interlock	Folding guardrail	Safety pedal switch	Platform working light

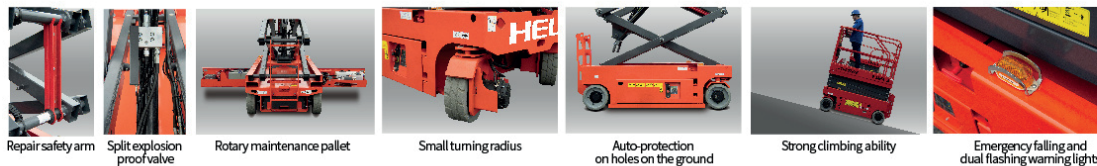

HELI CANADA

5705, place Kubota
 Drummondville (Qc)
 Canada, J2B 6V4
 1-833-HELICAN
 info@heliforklift.ca
 heliforklift.ca



Our products are subject to improvements and changes without notice.